

HVA28

Ultra-compact and universal VLF High Voltage Test Set

The b2 electronic GmbH high voltage testing **HVA28** offers outstanding features in terms of size, weight, ruggedness, safety and ease of use. Testing of medium voltage cables, rotating machines and transformers was never that easy.

Short Facts

- VLF and DC Output
- Sheath Test
- Sheath Fault Location
- Vacuum Bottle Test



14kg


10 μ F

IP67

DDD®



USB
Bluetooth

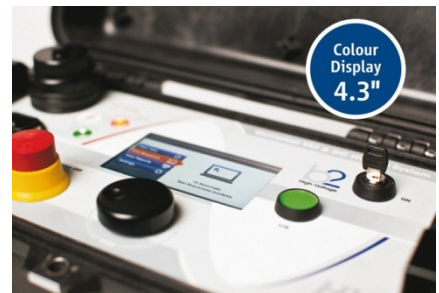

Colour
Display
4.3"

Features

- Output voltage 28kV_{peak}, 20kV_{rms}
- Pure sinusoidal output voltage (load-independent)
- Output current 20mA max.
- Highest test capacity of 10 μ F
- Ultra light and compact weight (14kg)
- Total protection - unbreakable, watertight, dustproof, chemical resistant and corrosion proof case
- Protection class IP67 (with closed lid)
- Unlimited and continuous duty cycle
- Large Colour display (4,3")
- Cable testing according: CENELEC HD 620/621, IEEE 400.2-2004, IEEE 400-2001, etc.
- Programmable test sequences
- USB and Bluetooth connections
- Upgradable with partial discharge diagnostic system (optional)
- Upgradable with tan delta diagnostics
- Integrated 12kV transient protection (50Hz)
- Dual Discharge Device (DDD®), both integrated and automatic discharge devices
- Easy exchangeable HV cable
- Intuitive menu operation
- Sheath Test
- Sheath Fault Locating (in combination with Earth Fault Locator)
- Vacuum Bottle Test

HVA28

Type	HVA28	
Article number	SH0219	
Input Voltage	100 - 240 V 50/60 Hz /400 (VA)	
Output Voltage	Sinusoidal	0 - 28 kV peak, 20 kV rms
	DC	± 0 - 28 kV
	Squarewave	0 - 28 kV
	Accuracy	± 1%
	Resolution	0.1 kV
Output Current	0 - 20 mA (Resolution 1 µA) Accuracy: ±1%	
Resistance Range	0.1 MΩ...5 GΩ	
Output Frequency	0.01 ... 0.1 Hz in steps of 0.01 Hz (default 0.1 Hz) - auto frequency	
Output Load	0.5 µF @ 0.1 Hz @ 20kV rms 5.0 µF @ 0.01 Hz @ 20 kV rms 10.0 µF maximum Capacitance! ¹	
Sheath Test	Max Test Voltage	10 kV
	Trip Current	0.1 mA - 5.0 mA
Sheath Fault Location ²	Max Test Voltage	10 kV
	Pulse/Period	1:3 / 4 s, 1:5 / 4 s, 1:5 / 6 s, 1:9 / 6 s
Output Modes	AC (VLF) Symmetrical and load independent across full range, DC (plus or negative polarity), Burn-/Fault Condition or Fault Trip Mode, Jacket / Sheath Testing	
Safety	50Hz 12kV Feedback Protection / Dual Discharge Device (internal)	
Memory	50 Test Records Stored	
Metering	Voltage and Current (True rms and / or peak), , Capacitance, Resistance, Time, Flashover Voltage	
Duty	Continuous! No thermal limitation for operating time.	
HV Cable	4 m with Alligator clamps	
Software	"HVA Control Center"	
Computer interfaces	Bluetooth	standard
	USB	standard
Environmental conditions	Storage: -25°C to + 70°C Operating: -5°C to + 45°C Humidity: 5-85% non condensing	
Dimensions L x W x H	Peli Case 1430, 430 x 240 x 340 mm	
Weight	14 kg	
Upgrades (Optional)	Partial Discharge System / Tangens Diagnostic System	

¹ At lower frequency and voltage

² in combination with locating device (not in scope of supply)

Options

- Tan Delta Diagnostics System
- Partial Discharge Diagnostics System PD30

Scope of delivery

- HVA28 Testing Device
- HV cable 4m
- Power and earthing cable
- Accessory bag
- USB stick
- Operating manual



Distribuido por:

OCEAN WINDS, S.L.

C/ Virgen de Montserrat, 118 08840 VILADECANS (Barcelona)
Tf. 93 658 17 84, info@impedancia.com, www.impedancia.com



DHV1301 Rev00
ENGLISH

Subject to alternations.
Errors excepted,
Illustrations are not binding.